

# KUNZMANN®

## FRÄSMASCHINEN

WF 410 M  
WF 610 M

UNIVERSAL MILLING AND DRILLING MACHINE



KUNZMANN-FRAESMASCHINEN.DE

**UNIVERSALITY**

The primary fields of application for KUNZMANN's WF 410 M and WF 610 M are workshops and training facilities, but also the precise manufacturing of individual parts and small batches. The vertical milling head has an extendible quill and can be swiveled by up to  $\pm 90^\circ$ . Our state-of-the-art milling and drilling machines are outstanding in terms of high performance, perfect precision, and easy handling.

**HIGH PERFORMANCE**

Modern, high-torque drives and solid machine axes with hardened flat guideways allow for processing of even difficult-to-cut materials.

**PERFECT PRECISION**

Infinitely variable single feed drives and backlash-free ball screws guarantee exact positioning and convenient up- and down-milling. For consistently high geometric accuracy and repeatability, our machines have linear encoders in all axes. Automatic axis clamping via the feed motor brakes ensures maximum operational safety.

**EASY HANDLING**

Due to optimum accessibility and ergonomically arranged operating elements, the WF 410 M and WF 610 M are flexible, compact, and easy-to-handle machines. The TNC 128 positioning control is centrally mounted on a rotary control desk and a pivoting arm. The operator can thus equally reach working area and control elements in a convenient manner. Our machine standard includes automatic mechanical tool clamping, an automatic central lubrication system, and a separate coolant system.

**AUTOMATIC MODE WITH CABIN**

If required, our machines can be equipped with a splash guard cabin for automatic machine operation. Furthermore, you may work with the KUNZMANN software option "Approximate Radius" for milling rounds with constant radii.



↑ Right side door open; operation with manual handwheels and 3-axis digital readout



← WF 610 M with splash guard cabin and HEIDENHAIN TNC 128 control

## HEIDENHAIN TNC 128 POSITIONING CONTROL

KUNZMANN's **WF 410 M** and **WF 610 M** are **manual machines** and operated via the practice-oriented positioning control TNC 128 by HEIDENHAIN.

You may choose between three operational modes using a **key switch**. The key can be removed in any position.

Your individual key management ensures that only designated operators use the machine in accordance with their qualification.

### 1. Manual Mode (3-axis active digital readout)

- ▶ Axis direction keys
- ▶ Incremental jog function
- ▶ Manual handwheels
- ▶ KUNZMANN Positioning Function
  - Setting and travelling a positioning block with
    - incremental and absolute dimensions
    - radius compensation

- ▶ Electronic handwheel (option)
- ▶ Quill for manual drilling

### 2. Single Run Mode

- "Manual Mode" functions and additionally
- ▶ Manual positioning – setting and travelling of different positioning blocks
  - ▶ Programming
  - ▶ Simulation
  - ▶ Single run

### 3. Full Sequence Run / Automatic Mode(\*)

- "Manual Mode" and "Single Run Mode" functions and additionally
- ▶ "Full Sequence Run" (automatic run of operating cycles and NC programs)
  - ▶ "Approximate Radius" option


\* in combination with splash guard cabin only

**MANUAL HANDWHEELS**


Our machines are equipped with safety handwheels for manual operations. The ergonomic position of the handwheels guarantees optimum access to the working area and a direct view on the workpiece.

**CENTRAL LUBRICATION SYSTEM**

With our lubrication system, track oil is transported directly to the guideways and afterwards centrally recollected. This prolongs the life of coolants as the contamination with track oil is reduced to a minimum. You can conveniently dispose of the collected oil with the removable oil dripping pan.

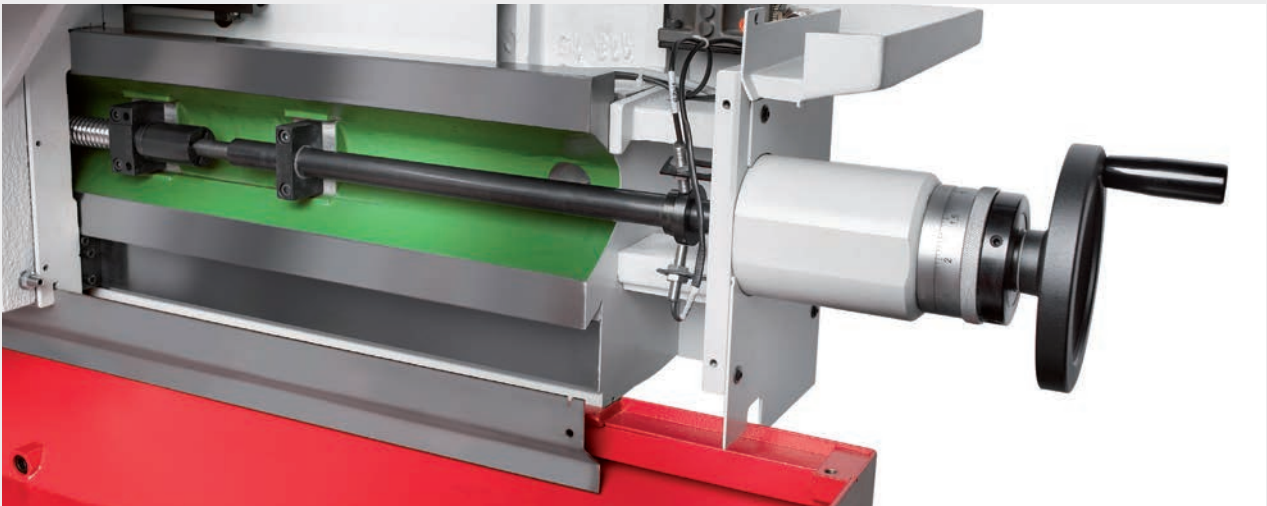

↑ Manual handwheel of X axis

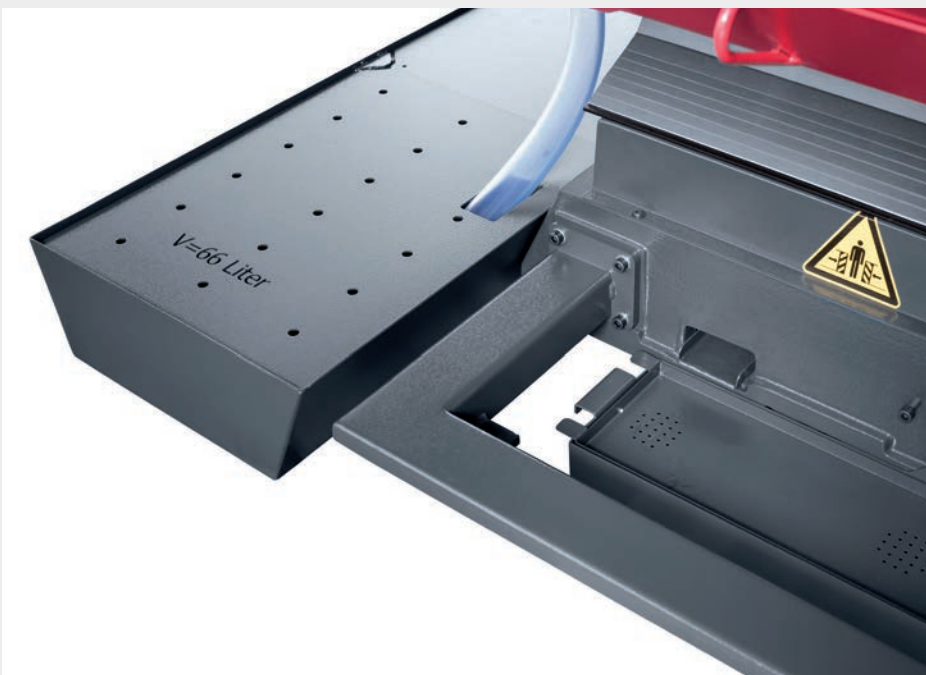

← Oil dripping pan and coolant tank



## OPTIONS

### HORIZONTAL SPINDLE AND ARBOR HOLDER

For horizontal milling, you can conveniently separate and pivot the vertical milling head on a support arm. A further option is working with an arbor holder for additional stability.

### ADDITIONAL PC KEYBOARD

This additional keyboard facilitates commentary or text entry in the control surface. It is protected against splash water and dirt.

### UNIVERSAL TILTING-SWIVELING TABLE

The universal tilting and swiveling table allows the operator to position the workpiece in different angular positions. Adjustment is done manually with the rotation angle of the clamping plate being indicated on a digital readout.

### ELECTRONIC HANDWHEEL

With the portable handwheel, the operator is able to work in close proximity to the working area. It features axis-direction keys, keys for feed rates, and function keys.

### DIGITAL READOUT FOR QUILL STROKE

The quill stroke is comfortably displayed on the milling head display.



### TOUCH PROBE SYSTEMS AND AUTOMATIC TOOL MEASUREMENT

Combined with the probing cycles of the control, triggering 3D touch probe systems facilitate setup, measuring, and monitoring during manufacturing. Specific control cycles are used to automatically measure tool length, tool radius, and tool wear with a matching probe.



WF 410 M with PLEXIGLAS® splash protection, arbor holder, horizontal spindle (1), universal tilting-swiveling table (2), TNC 128 with additional keyboard (3)





**WF 410 M**

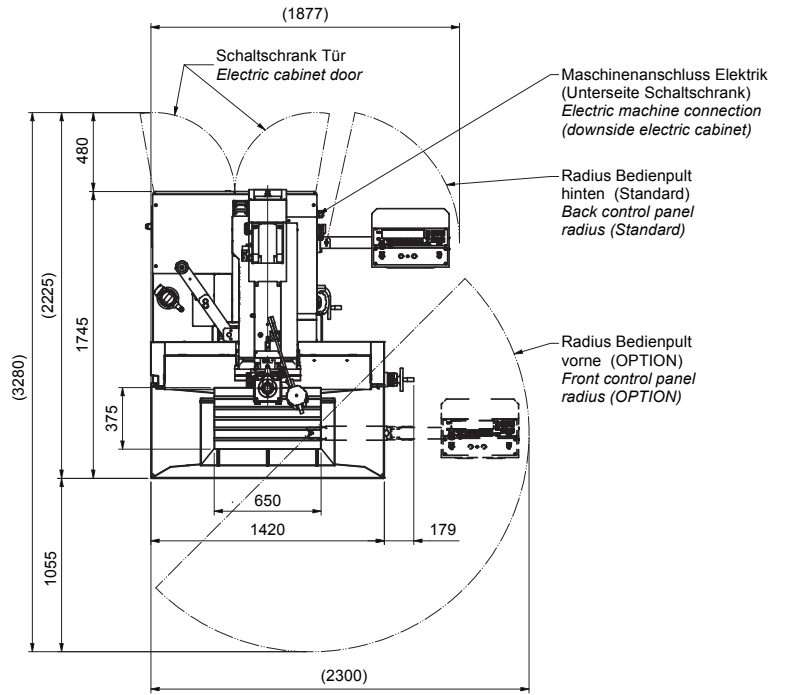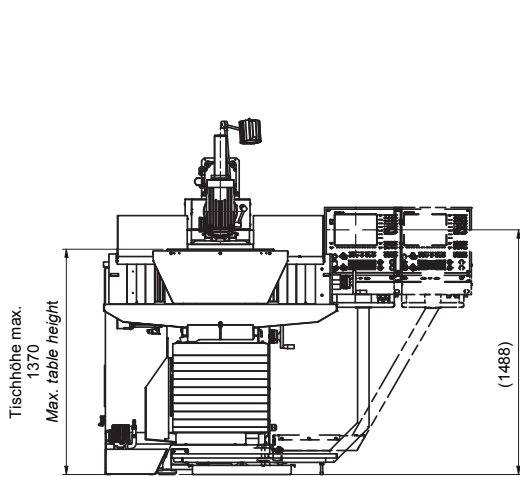



**WF 410 M with splash guard cabin**

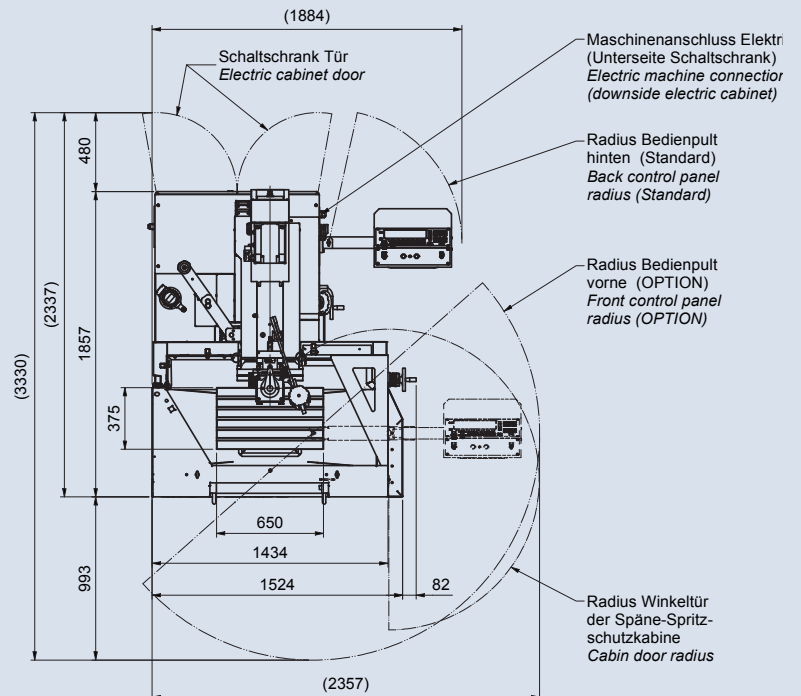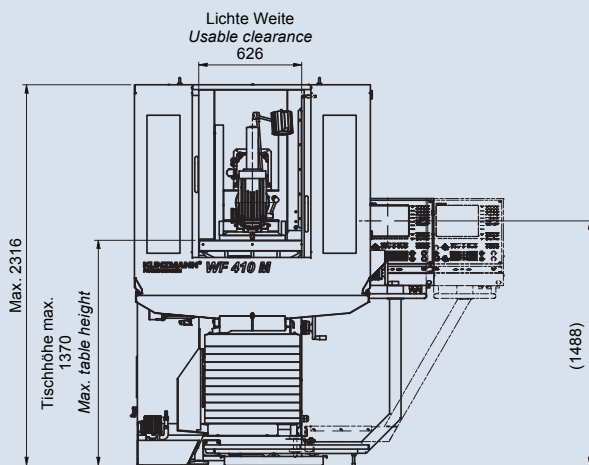

**WF 610 M**

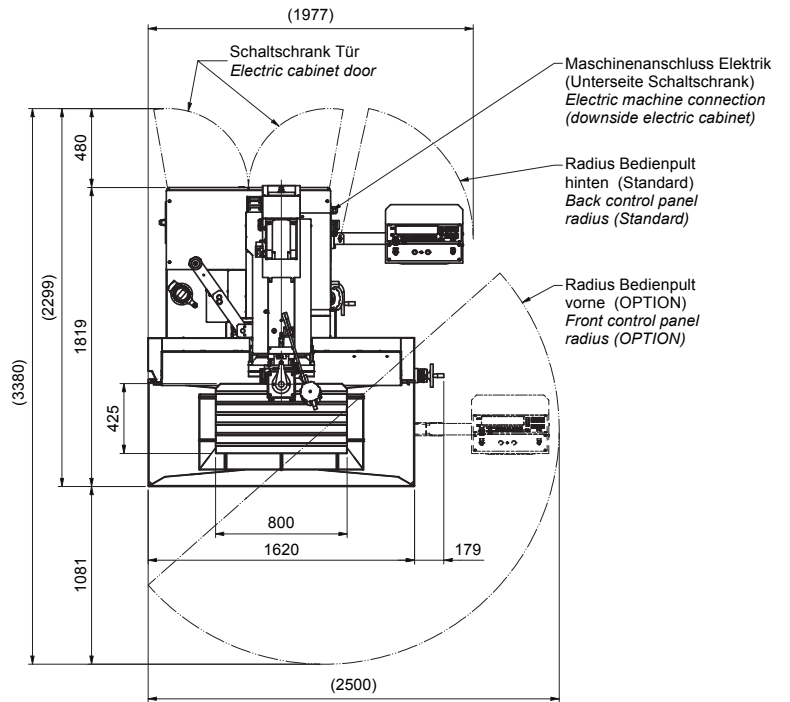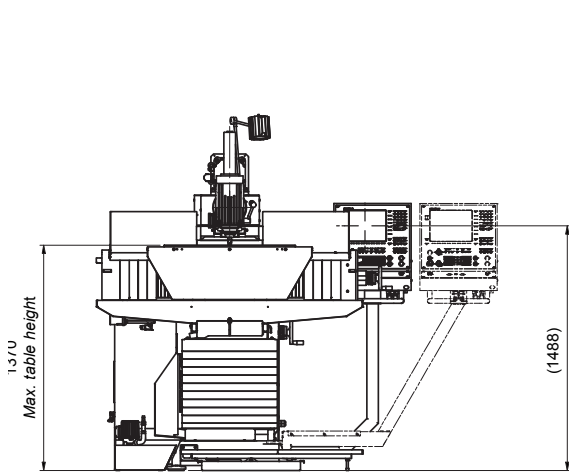

**WF 610 M with splash guard cabin**

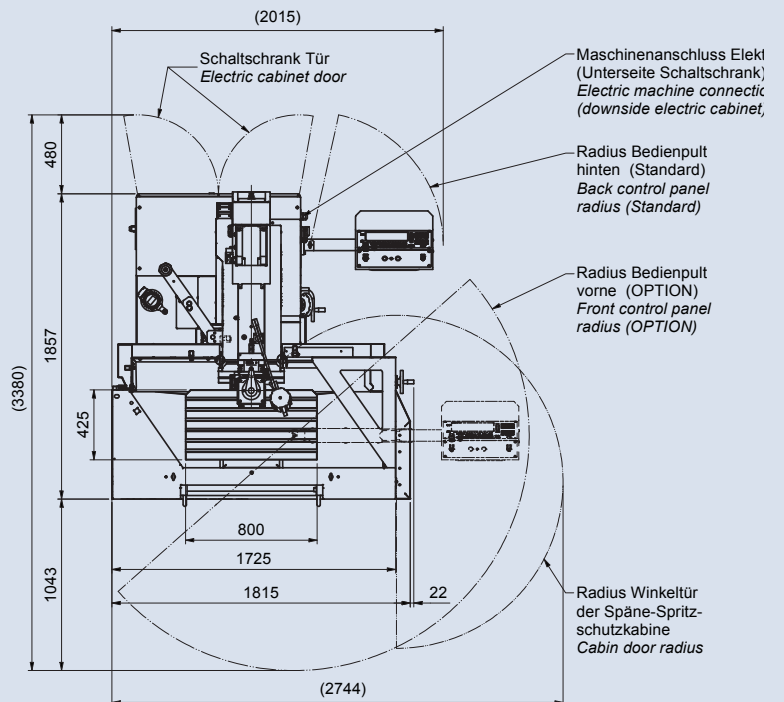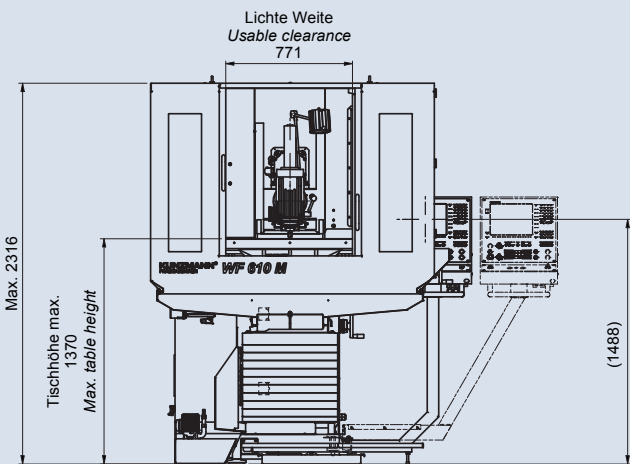

**STANDARD EQUIPMENT**

- ▶ Vertical milling head with quill
- ▶ Flat guideways in all axes (hardened)
- ▶ Ball screws
- ▶ Automatic axis clamping
- ▶ Automatic mechanical tool clamping
- ▶ Linear encoders
- ▶ Manual handwheels
- ▶ Automatic central lubrication
- ▶ Chip tray
- ▶ Coolant tank, free-standing, 66 liters
- ▶ LED machine light
- ▶ Leveling elements

**OPTIONS**

- ▶ Rigid angular table
- ▶ Universal tilting-swiveling table
- ▶ Digital readout for quill stroke
- ▶ Electronic handwheel HR 510 FS
- ▶ PLEXIGLAS® splash protection
- ▶ Splash guard cabin
- ▶ Minimum-quantity lubrication system
- ▶ Horizontal spindle
- ▶ Collision protection coupling
- ▶ Arbor holder
- ▶ Dividing head
- ▶ Touch probe systems
- ▶ KUNZMANN StateViewer Premium



Visit our Website

**KUNZMANN®**  
FRÄSMASCHINEN

KUNZMANN Maschinenbau GmbH  
Tullastraße 29-31, 75196 Remchingen  
Phone: +49 (0) 7232 / 36 74-0  
Fax: +49 (0) 7232 / 36 74-74  
E-mail: info@kunzmann-fraemaschinen.de  
www.kunzmann-fraemaschinen.de

<b>Working range</b>	longitudinal, X axis cross, Y axis vertical, Z axis	410 / 610 mm 350 / 400 mm 450 mm
<b>Main drive</b>		
* at 1,000 rpm	perf. at 100% of duty cycle* perf. at 25% of duty cycle* torque at 100% of duty cycle* torque at 25% of duty cycle*	8.5 16.2 81 Nm 154 Nm
<b>Spindle speed</b>		1-4,500 rpm
<b>Feed drives</b>	AC single drives	
<b>Feed</b>	X and Y axis Z axis	5 m/min 4 m/min
<b>Swiveling range of vertical milling head</b>		+/- 90°
<b>Vertical quill</b>	stroke	70 mm
<b>Tool taper</b>		SK 40 DIN 69871 HSK 63-A DIN 69893-1
<b>Angular table</b>	WF 410 M WF 610 M	650 x 375 mm 800 x 425 mm
<b>Universal tilting-swiveling table</b>	rotational angle digitally indicated	650 x 395 mm
<b>Operating voltage</b>		400 V / 50 Hz
<b>Control</b>	HEIDENHAIN	TNC 128
<b>Power consumption</b>		13 kVA
<b>Installation weight</b>	WF 410 M WF 610 M	approx. 1,900 kg approx. 2,000 kg

- ▶ Manufacturer of universal milling machines and vertical machining centers
- ▶ Expert technology consulting
- ▶ Customized application technology
- ▶ Individual programming trainings
- ▶ Fast and convenient after-sales support

Our strong partner

